




## 2 Channel Ethernet-Sensor-Interface with Configuration and Evaluation Software

**SI-ETH**

- Fast Measurement of up to 2500/s per Measuring Channel
- Up to 16 Bit Resolution
- Full Synchronism of both Measuring Channels
- Input Ranges for mV, V and mA
- Input Ranges combinable
- Adjustment and Control Trigger via Software
- Voltage Supply via PoE or separate Power Supply

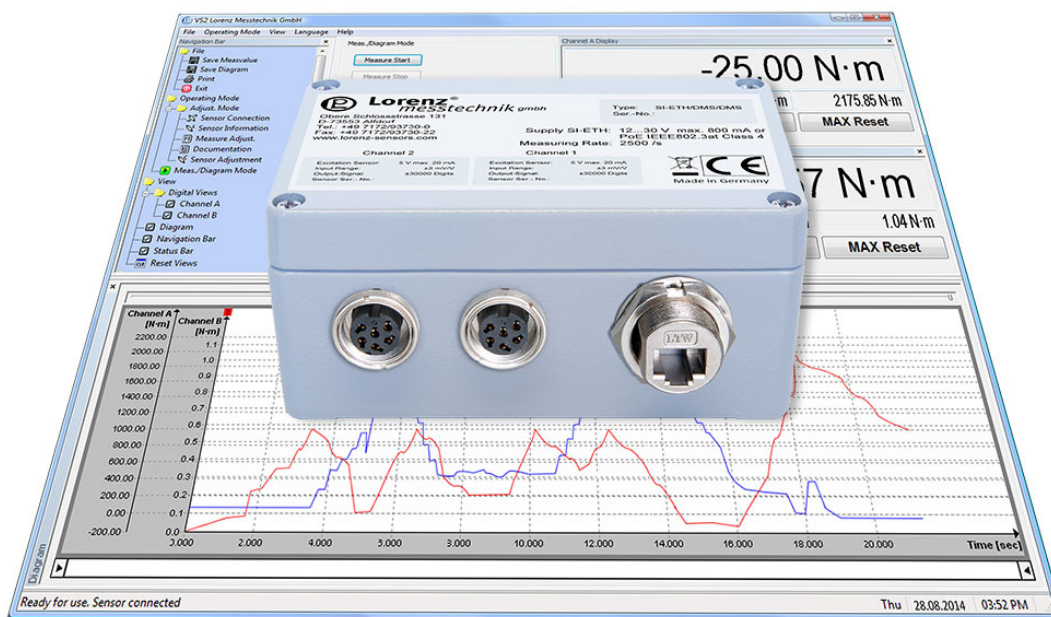

### Description

Via the sensor interface SI-ETH, a sensor is connected to a PC through an IP-based Ethernet. By this, analog sensor signals with up to 16 bit resolution are digitized.

By a measuring rate of 2500 measurements/sec per channel, highly dynamic measurements are possible as well. The measured values are transferred to a PC via the Ethernet interface and are visualized through the software.

If a control signal is integrated in the sensor, an automatic adjustment can be carried out, which is checkable at any time (monitoring of the measuring chain).

Following sensor output signals can be digitally converted and conveniently displayed and evaluated by the freely available corresponding software:

ETH/DMS	Excitation 5V ≤20 mA Input Range ±3 mV/V
ETH/U5/U10	Excitation 12V ≤200 mA Input Range ±5V/±10V
ETH/I20	Excitation 12V ≤200 mA Input Range 0/4 .. 20 mA

Many commercially available sensors such as force-, torque-, displacement- or pressure sensors can be used with the SI-ETH. The sensor parameters can be stored in the SI-ETH. After a once-only parameterization, each sensor is automatically recognized by the software.

The voltage supply of the SI-ETH occurs via an external power supply unit or with PoE via the network cable. Through the measuring amplifier, the connected sensors are directly supplied with voltage, so a separate supply of the sensors is omitted.

Unwanted frequencies are filtered with the second-order low-pass filter. Here, 4 different limit frequencies are selectable. The connection to LabVIEW or the integration into your own programs is possible with the freely available driver package.

**Specifications**

Type	SI-ETH/DMS/DMS	SI-ETH/U5/U5	SI-ETH/U10/U10	SI-ETH/I20/I20	SI-ETH/DMS/U5
Article-No.	114907	114908	114909	114910	114911
Input Range	2* ±3 mV/V	2* ±5V	2* ±10V	2* 0/4 .. 20 mA	±3 mV/V; ±5V
Type	SI-ETH/DMS/U10	SI-ETH/DMS/I20	SI-ETH/U5/U10	SI-ETH/U5/I20	SI-ETH/U10/I20
Article-No.	114912	114913	114914	114915	114916
Input Range	±3 mV/V; ±10V	±3 mV/V; 0/4 .. 20 mA	±5V; ±10V	±5V; 0/4 .. 20 mA	±10V; 0/4 .. 20 mA

**Evaluation Side**

Supply power supply <sup>1</sup>	Voltage	100 .. 240VAC 24VDC, 1.25 A
Output power supply		12 .. 30VDC < 800 mA or IEEE802.3at Class 4
External supply		
PoE supply		
Sensor supply	Strain gauge U5/U10/I20	5V ≤20 mA 12V ≤200 mA
Measured values	Strain gauge U5/U10 I20	±3 mV/V = ±30000 Digits ±5V/±10V = ±25000 Digits 0/4 .. 20 mA = 0/4000 .. 20000 Digits
Resolution	Strain gauge U5 U10 I20	1 mV/V = 10000 Digits 1V = 5000 Digits 1V = 2500 Digits 1 mA = 1000 Digits
Zero point	Strain gauge/U5/ U10/I20	0 Digits
Output format		16 Bit signed Int.
Input resistance	Strain gauge/U5/U10 I20 burden	>1 MΩ 62 Ω
Second-order low-pass filter	Hz	30/300/1000/3000
Measuring rate		max. 2500 Meas./s
Temperature drift		4 Bit/10 K
Linearity error		±32 Digits
Accuracy		±32 Digits

**Miscellaneous**

Cable length SI-ETH - sensor		1 m (max. 3 m)
Nominal temperature range		10 .. 40°C
Service temperature range		0 .. 50°C
Storage temperature range		-10 .. 70°C
Dimensions (L x B x H)		125 x 80 x 57 mm
Weight		480 g
Level of protection		IP40
Electrical connection	Strain gauge U5/U10/I20 Ethernet <sup>2</sup>	Female socket 6-pin Female socket 12-pin RJS-5EBMMM-SL7E02 (RJ45)

**Options/ Accessories**

Article-No.	Type	Designation
115134	mV/V/±10V/0/4...20mA	Adjustment amplifier with simulator
113591	LCV-USB2/SI-USB/-RS485/-ETH/4,5mV/V	Sensitivity ±4.5 mV/V per channel
10302	KS6	Male cable connector 6-pin
10303	KS12	Male cable connector 12-pin
10296	KDM7/A-KS6/A-3m/PVC	Connection cable for passive sensors, 3 m, with 7-pin female cable connector and 6-pin male cable connector
10271	KD6/A-KS6/A-3m/PVC	Connection cable for passive sensors, 3 m, with 6-pin female cable connector and 6-pin male cable connector
10279	KDM8/A-KS12/B-3m/PVC	Connection cable for active sensors, 3 m, with 8-pin female cable connector and 12-pin male cable connector
10283	KD12/B-KS12/B-3m/PVC	Connection cable for active sensors, 3 m, with 12-pin female cable connector and 12-pin male cable connector
115523	PoE12-HP	PoE power-supply-injector for voltage supply


<sup>1</sup> At first delivery power supply in scope of delivery.<sup>2</sup> At first delivery cable SI-ETH evaluation in scope of delivery, cable length 5 m.



## Configuration and Evaluation Software

**VS2**

- Comfortable Configuration and Evaluation Software
- Graphical Presentation of up to 2 Input Channels max.
- Automatic Scaling of Y-axis
- Simultaneous Storage of up to 2 Input Channels
- Automatic Storage Function of the Measured Values as CSV- or BMP-File

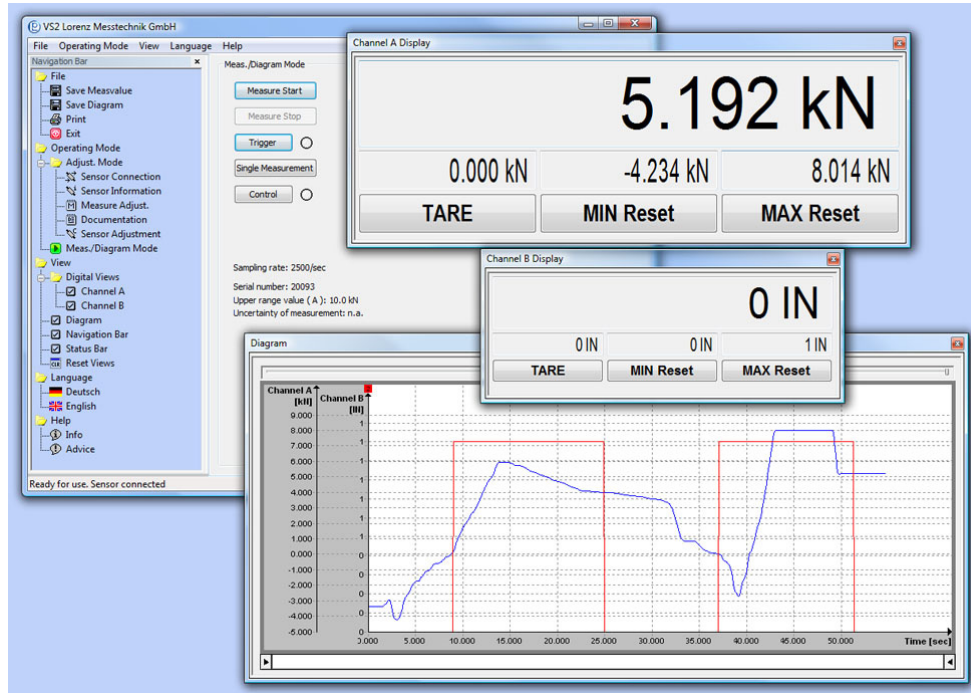

### Description

Configuration and evaluation software for analysis and graphical presentation on a PC.

The software allows direct read-in of measured data into a text file in CSV-Format through the Ethernet interface. This allows further analyses with a commercially available spreadsheet program at any time.

### Specifications

Type	VS2 <sup>3</sup>
Interface	Ethernet
Protocol	Lorenz standard protocol
System requirements	Windows <sup>®</sup> '03/ '08/ Vista/ 7/ 8 32/64 Bit <sup>4</sup> Dual-Core ab 1.8 GHz (with diagram)

Conversion in physical variables	✓
Simultaneous measurement	Up to 2 input channels
Graphical presentation of the measured variables	✓
Automatic or manual storage in a CSV- and BMP-file	✓
Print-out of the diagram with date and definable headline	✓
Scaling function of the input variable to any display value with unit	✓
Resettable minimum value memory for any measured variable	✓
Resettable maximum value memory for any measured variable	✓
Sliding average determination	✓
Tare for each measured value	✓

<sup>3</sup> Software/driver download: [www.lorenz-sensors.com](http://www.lorenz-sensors.com).

<sup>4</sup> Windows<sup>®</sup> is either a registered brand or brand of the Microsoft Corporation in the USA and/or other countries.

All trademarks or brands used in this document refer only to the respective product or the holder of the trademark or brand. Lorenz Messtechnik GmbH does not raise claims to other than their own trademarks or brands.