



NP40

- PORTABLE POWER QUALITY ANALYZER


NP40 power quality analyzer is the professional portable device to measure and analyze the power system quality, supply the harmonics analysis and power quality data analysis, also provide big memory for the data storage, which is used to make the long term logger measuring to power system. The PC software can simply upload the data to PC for full analysis.

FEATURES

- 5,6" TFT color screen, 320 x 240 pixel.
- Waveform real-time display (4 voltages/4 currents).
- Half cycle RMS measurement (voltage and current).
- Measurement of TRMS currents up to 3000 A (with standard probes mode).
- Measurement in 1-phase and 3-phase systems (3 - and 4-wire).
- Measurement of voltage, current, harmonics, power, energy, inrush current, flicker and other.
- Graphical presentation of data in a waveform and vector diagram.
- Record of events: dips, swells, overvoltages.
- Power quality according to EN-50160 standard or user-defined limit (registration time from 2 hours to 7 days).
- Registration of user-defined parameters in the 8GB internal memory (frequency of registration from 1 second up to 60 minutes, registration time from 2 h up to 1 year).
- Ethernet interface for remote operation of the analyzer.
- USB Host to move archive data and screenshots to an external USB memory.
- Safety standards: EN 61010-1, CAT III 1000V / CAT IV 600V.
- The analyzer set: analyzer, voltage tests leads alligator clips (5x), DC power adapter, CD with software, user's manual.



MEASUREMENTS MODES

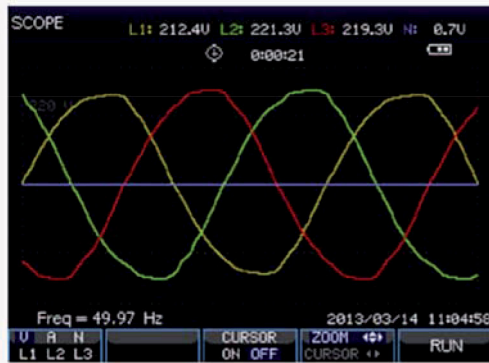

1 Scope

View the voltage/current waveform and readings. Cursor Zoom function.

2 Voltage/Current/Frequency

Measure voltage/current/frequency and crest factor.

Volts/Amps/Hertz


0:00:06

| | L1 | L2 | L3 | N |
|------|-------|-------|-------|-------|
| Urms | 238.7 | 238.7 | 238.7 | 4.842 |
| Upk | 315.2 | 315.2 | 315.2 | 8.518 |
| CF | 1.32 | 1.32 | 1.32 | 1.76 |

| | L1 | L2 | L3 | N |
|------|-------|-------|-------|-------|
| Irms | 43.60 | 6.335 | 6.346 | 0.814 |
| Ipk | 60.33 | 7.630 | 7.901 | 1.113 |
| CF | 1.38 | 1.20 | 1.25 | 1.37 |

Freq = 50.00 Hz 2015/03/09 22:18:53

PHASE WIRE TREND HOLD

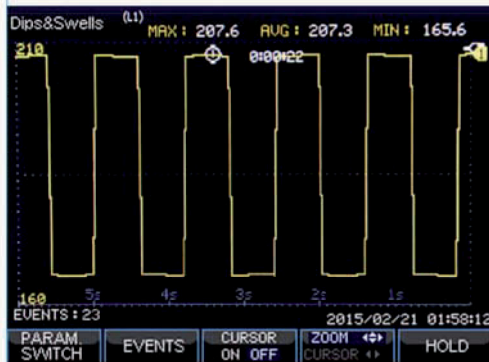

3 Dips & Swells

Capture the abnormal event, such as swells, dips, interruption and rapid voltage change.

4 Harmonics

Harmonics and interharmonics measurement up to the 50th, parameter DC component, THD, K-factor.



Power & Energy

0:01:32

| | L1 | L2 | L3 | Total |
|---------|-------|-------|-------|-------|
| P(kW) | 3.311 | 1.472 | 1.482 | 6.265 |
| S(kVA) | 10.39 | 1.501 | 1.500 | 13.39 |
| Q(kVAR) | 9.845 | 0.293 | 0.234 | 10.37 |
| TPF | 0.32 | 0.98 | 0.99 | 0.47 |
| KWh | 0.048 | 0.037 | 0.038 | 0.123 |
| KVAh | 0.262 | 0.038 | 0.038 | 0.338 |
| KVARh | 0.248 | 0.008 | 0.006 | 0.000 |

2015/03/09 22:23:23 0:01:32

CLOSE ENERGY TREND RESET ENERGY

5 Power and energy

Full power parameters measurement including Vrms/Arms/KW/KVA/KVAR/TPF/DPF and energy data KWh/kVAh/kVARh.

6 Flicker

Support measure the parameters Pst (<10 min), Plt (<2 hrs), also Pst (1 min) for quick feedback and instant flicker pinst in trend.

Flicker

0:00:08

| | L1 | L2 | L3 |
|-----------|------|------|------|
| Pst(1min) | 0.00 | 0.00 | 0.00 |
| Pst | 0.00 | 0.00 | 0.00 |
| Plt | 0.00 | 0.00 | 0.00 |

2015/03/09 22:25:16

PF 5 HOLD



7 Unbalance


Check the unbalance in 3 phases based on EN 61000-4-30 standard.

8 Transients

Capture waveform at high-resolution during a variety of disturbances, maximum 100 events, sample rate 20Ks/s.



MEASUREMENTS MODES

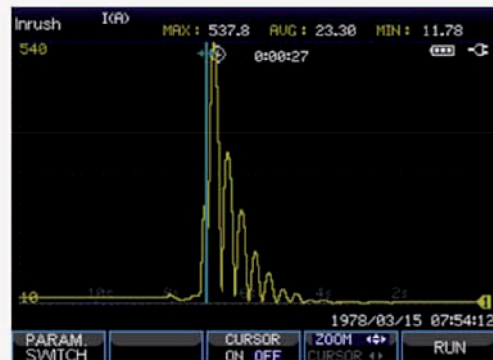

9 Inrush current
 Capture the surge currents that occur in a large or low-impedance load comes on line.

10 Logger
 Record the measuring data as selectable parameters and interval, duration. The saved data in TF card, which can be downloaded to PC by USB and check by Power View software.




11 Monitor
 Measure all the parameter Vrms, Arms, harmonics, flicker, dip, swell, rapid voltage change, interruption, unbalance, frequency at the same time, check whether meet the requirements limited by users or default standards EN50160. The monitoring time lasts from 2 hours to 7 days.


LUMEL POWER ANALYZER SOFTWARE

LUMEL Power Analyser is easy operation software to make the remote control to analyzer and view the download data.


AUTO Scan the device connected to PC through LAN interface

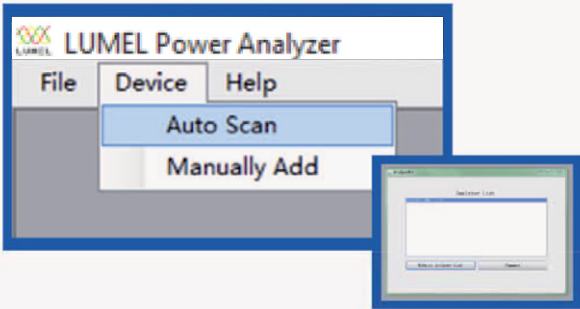


Remote control interface

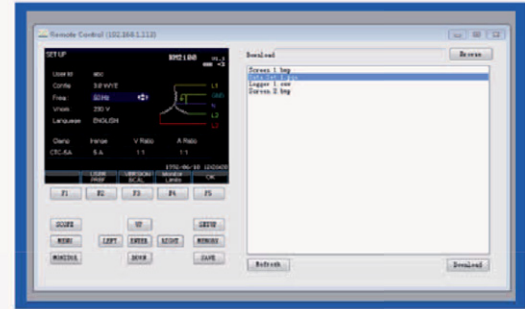


Monitor the user-demanded parameters

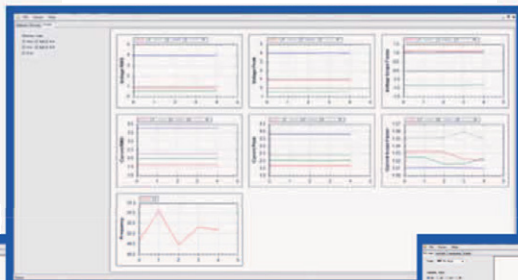

Visual view of data trend (max, min, average)

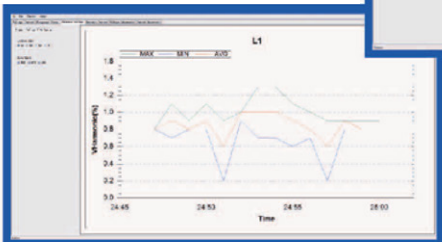

Visual view of data trend (max, min, average)

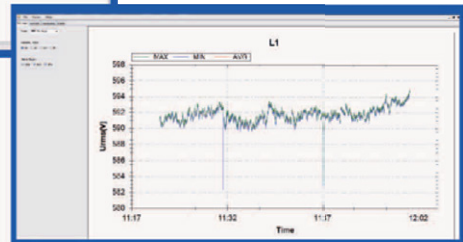

TECHNICAL DATA

▶ INPUTS

VOLTAGE INPUTS

| | |
|--------------------------|-----------------------|
| Input Channels | 4 (3-phase + neutral) |
| Max. input voltage | 1000 Vrms |
| Range of nominal voltage | 50...500V |
| Max pulse peak voltage | 6kV |
| Bandwidth | >3kHz |
| Input impedance | 4MΩ/5pF |

CURRENT INPUT

| | |
|-----------------|---|
| Number of input | 4 (3-phase+ neutral) DC coupling |
| Type | clamp current sensor with mV output |
| Input range | 1...3000 Arms with supplied current clamp |
| Input Impedance | 50 kΩ |
| Bandwidth | >3kHz |

SAMPLING SYSTEM

| | |
|--------------------|---|
| Resolution | 8 channels 16 bits AD |
| Sampling rate | 20kS/s for each channel, 8 channels sample synchronously |
| RMS sampling | 5000 points for 10/12 cycles (according to EN 61000-4-30) |
| PLL synchronizacja | 4096 points for 10/12 cycles (according to EN 61000-4-7) |

▶ MEASUREMENT

| | Measurement range | Resolution | Accuracy |
|----------------------------------|------------------------------|------------|---------------------------|
| VOLTAGE/CURRENT/FREQUENCY | | | |
| Vrms (AC+DC) | 1 ~ 1000Vrms | 0.1Vrms | ± 0.5% of nominal voltage |
| Vpk | 1 ~ 1400Vpk | 0.1Vpk | ± 0.5% of nominal voltage |
| V (crest factor) | 1.0 ~ >2.8 | 0.01 | ± 5% |
| Arms (AC) | 1~ 1000A/3000A/5000A | 1A | ± 1% ± 2A |
| | 1~ 100A | 0.1A | ± 1% ± 0.2A |
| Apk | 1 ~ 4000Apk | 1A | ± 1% ± 2A |
| A (crest factor) | 1 ~ 10 | 0.01 | ± 5% |
| Frequency | 42.5 ~ 57.5Hz (50Hz nominal) | 0.01Hz | ± 0.01Hz |
| | 51 ~ 69Hz (60Hz nominal) | 0.01Hz | ± 0.01Hz |

DIPS & SWELLS

| | | | |
|------------------|--|------------|-----------|
| Vrms1/2 | 0 ~ 200% of nominal voltage | 0.1Vrms | ± 1% |
| Arms1/2 | 1 ~ 3000A | 1A | ± 1% ± 2A |
| Threshold levels | Threshold is settable according to nominal voltage percentage. Detectable events type: dips, swells, interruption, voltage rapid change. | | |
| Duration | hour-minute-second-microsecond | 0.5 period | 1 period |

► MEASUREMENT

| | Measurement range | Resolution | Accuracy |
|--|--|------------|----------------------|
| HARMONIC | | | |
| Harmonic number | 1 ~ 50 | | |
| Inter-harmonic | 1 ~ 49 | | |
| Harmonic voltage | 0.0 ~ 100.0% | 0.1% | ±0.1% ± nx0.1% |
| Harmonic current | 0.0 ~ 100.0% | 0.1% | ±0.1% ± nx0.1% |
| THD | 0.0 ~ 100.0% | 0.1% | ±2.5% |
| DC Relative | 0.0 ~ 100.0% | 0.1% | ±0.2% |
| Frequency | 0 ~ 3500Hz | 1Hz | 1Hz |
| Phase | -360° ~ 0° | 1° | ± nx1.5° |
| POWER & ENERGY | | | |
| Active power P (kW), apparent power S (kVA), reactive power Q (kvar) | 1.0 ~ 20.00MW | 0.1kW | ± 1.5 ±10 characters |
| Kilowatt-hour | 0.00kWh ~ 200GWh | 10Wh | ± 1.5 ±10 characters |
| Power factor (TPF) | 0 ~ 1 | 0.01 | ± 0.03 |
| Cosφ (DPF) | 0 ~ 1 | 0.01 | ± 0.03 |
| Tgφ (tanθ) | -10...10 | 0,01 | ± 3 |
| FLICKER | | | |
| Pst (1min), Pst, PIt, PF5 | 0.00 ~ 20.00 | 0.01 | ±5% |
| UNBALANCE | | | |
| Voltage | 0.0 ~ 5.0% | 0.1% | ± 0.5% |
| Current | 0.0 ~ 20.0% | 0.1% | ± 1% |
| Voltage phase | -360° ~ 0° | 1° | ± 2 digits |
| Current phase | -360° ~ 0° | 1° | ± 5 digits |
| VOLTAGE TRANSIENT | | | |
| Vpk | ±6000 Vpk | 1V | ±15% |
| Vrms | 10 ~ 1000Vrms | 1V | ±2.5% |
| Min. Test Time | 50us | | |
| Sampling rate | 20kS/s | | |
| INRUSH CURRENT | | | |
| Arms (AC+DC) | 0~3000 Arms | 0,1 | ±1% ± 5 digits |
| Inrush duration | 6s ~ 32min selectable | 10 ms | ±20 ms |
| LOGGER | | | |
| Recording | user-definded parameters for 4 phases at the same time | | |
| Memory | data stored in TF card, 8GB | | |
| Duration time | 2 hrs to 1 year | | |
| Interval | 1s to 1 hr | | |

► GENERAL CHARACTERISTICS

| DISPLAY | |
|-------------------------------|---|
| Screen | color TFT LCD |
| Size | 5,6 inch |
| Resolution | 320×240 |
| Brigthness | adjustable |
| HOUSING | |
| Protection | protection shield, strong |
| IP | IP51, acc. to EN 60529 |
| INTERFACE | |
| USB Host | Download file to PC by U disk for analyze with PC software. |
| LAN | For remote control of the analyzer and measurement data transmission. |
| MEMORY | |
| FLASH memory | 128MB |
| Tf card | 8GB |
| MECHANICAL | |
| Dimension | 262× 173 × 66mm |
| Weight | 1.6 kg |
| ENVIROMENT | |
| Working temperature | 0°C~ 40°C |
| Storage temperature | -20°C~ 60°C |
| Humidity | 90% relative humidity |
| POWER | |
| Adapter input | 90~264V |
| Adapter output | 9V 2.2A |
| Battery | rechargeable lithiumion 7.4V 4.4Ah |
| Battery working time | > 7 hours |
| Battery charge time | 4 hours |
| STANDARD | |
| Measurement method | EN 61000-4-30 Class-S |
| Measurement performance | EN 61000-4-30 Class-S |
| Power quality monitoring | EN 50160 |
| Flicker | EN 61000-4-15 |
| Harmonic | EN 61000-4-7 |
| ELECTRICAL SAFETY | |
| Comply with | EN 61010-1 |
| Max. voltage at voltage input | 600V CAT IV, 1000V CAT III |
| Max. voltage at current input | 30V |

► ANALYZER SET

| | |
|-------------------------------------|------------------|
| Voltage tests leads alligator clips | length 2m, 5 pcs |
| Power adapter DC | 1 pc |
| Power patch cord | 1 pc |
| Soft carry bag | 1 pc |
| Hang strap | 1 pc |
| CD wit software, user's manual | 1 pc each |

► THE SPECIFICATION OF ADDITIONAL EQUIPMENT (CURRENT CLAMPS/ ROGOWSKI COILS)

| Model | Range | Turns ratio | Accuracy | Size mm |
|---------------------------|-------|-------------|---------------------------|---------|
| KLC8C-5A (clamps) | 5A | 10mV/A | 0.2% | Ø8 |
| CTC0080 (clamps) | 50A | 10 mV/A | 0.2% | Ø8 |
| CTC0130 (clamps) | 100A | 10 mV/A | 0.2% | Ø13 |
| CTC1535 (clamps) | 1000A | 1 mV/A | 1.0% | Ø52 |
| PY-3000A (Rogowski coils) | 3000A | 65 mV/1000A | 1.0% (+2% position error) | Ø162 |
| PY-5000A (Rogowski coils) | 5000A | 50 mV/1000A | 1.0% (+2% position error) | Ø143 |

ORDERING CODE

Table 1. NP40 ordering code:

| | | | | |
|--|---|----|---|---|
| Portable power quality analyzer NP40 - | X | XX | X | X |
| Additional equipment: | | | | |
| lack | 0 | | | |
| 4 pcs. Rogowski coils PY 3000 A | 1 | | | |
| 4 pcs. Rogowski coils PY 5000 A | 2 | | | |
| 4 pcs. current clamps KLC8C 5 A | 3 | | | |
| 4 pcs. current clamps CTC0080 50 A | 4 | | | |
| 4 pcs. current clamps CTC0130 100 A | 5 | | | |
| 4 pcs. current clamps CTC1535 1000 A | 6 | | | |
| Version: | | | | |
| standard | | 00 | | |
| custom-made* | | XX | | |
| Language: | | | | |
| Multilanguage (Polish/English) | | | M | |
| other* | | | | X |
| Acceptance tests: | | | | |
| without extra requirements | | | | 0 |
| with an extra quality inspection certificate | | | | 1 |
| acc. to customer's request* | | | | X |

* after agreeing with the manufacturer



PORTABLE MULTIMETERS & METERS

MORE INFORMATION
IN OUR CATALOG:



ND40 - NEW POWER NETWORK ANALYZER/RECORDER



- Measurement and recording of over 500 electric energy quality parameters acc. to EN 50160, EN 61000-4-30, EN 6100-4-7 standards.
- Measuring class A - for 3 second aggregation. 10 minute and 2 hour aggregation - class S.
- Operation in 3 or 4-wire, 3-phase, balanced or unbalanced power networks.
- Analysis of current and voltage harmonics up to the 51 st for class I (acc. to EN 61000-4-7).
- Configurable archives of actual values and event recording.
- Data archiving on an SD card - memory up to 32 GB.
- Web Server, FTP Server.
- Interfaces: RS-485 Modbus Slave, Ethernet 100 Base-T (Modbus TCP Server), USB Device & Host.
- Colour touch screen: LCD TFT 5.6", 640 x 480 pixels.
- IP65 protection grade from the frontal side.
- Synchronization of RTC clock with the NTP time server.

NP40-19A-en

LUMEL
EVERYTHING COUNTS

LUMEL S.A.
ul. Sulechowska 1, 65-022 Zielona Góra, POLAND
tel.: +48 68 45 75 100, fax +48 68 45 75 508
www.lumel.com.pl

Export department:
tel.: (+48 68) 45 75 139, 45 75 233, 45 75 321, 45 75 386
fax.: (+48 68) 32 54 091
e-mail: export@lumel.com.pl