


MODEL 4623 ACCELEROMETER



DIMENSIONS

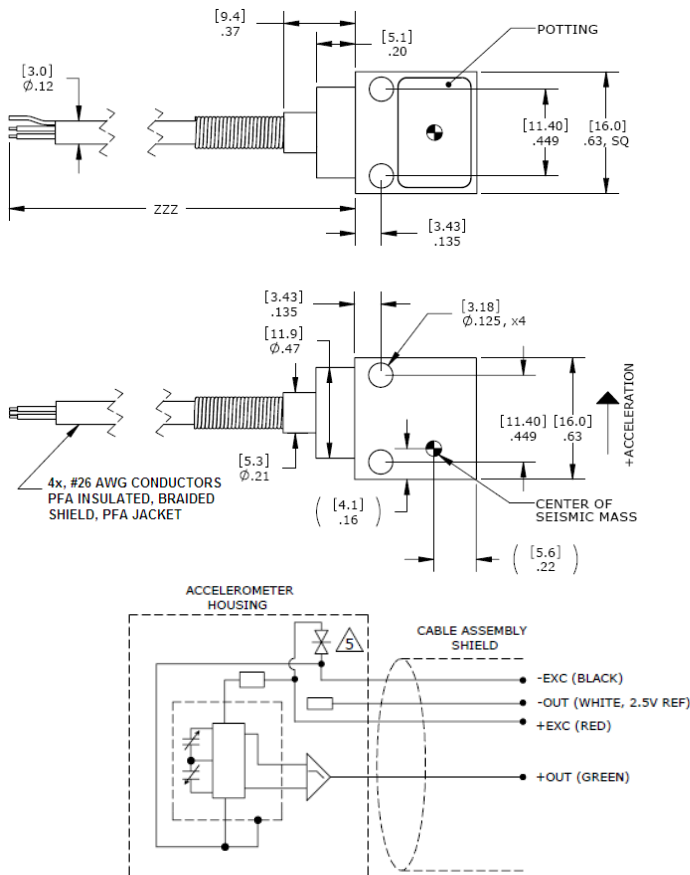

SPECIFICATIONS

- ◆ MEMS Accelerometer
- ◆ DC Response, Ultra-Stable
- ◆ Advanced Temp Compensation
- ◆ Signal Conditioned Output
- ◆ Integral Strain Relief

The Model 4623 is a low frequency DC response accelerometer offering outstanding performance over a wide operating temperature range. The accelerometer is available in ranges from ± 2 to $\pm 100g$ and incorporates an EMI/EMC protection circuitry for harsh installations. The output is signal conditioned to provide a low noise amplified signal. The model 4623 incorporates a PFA insulated cable with a rugged strain relief designed for demanding applications.

FEATURES

- ◆ $\pm 2g$ to $\pm 100g$ Dynamic Range
- ◆ Signal Conditioned Output
- ◆ EMI/EMC Protection Circuit
- ◆ Gas Damping
- ◆ Integral Strain Relief
- ◆ DC, Low Frequency Response
- ◆ 7 to 30Vdc Excitation Voltage

APPLICATIONS

- ◆ Harsh Applications
- ◆ Structural Testing
- ◆ Test & Instrumentation
- ◆ Performance Testing
- ◆ Transportation
- ◆ Flight Testing

PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 12Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters							Notes
DYNAMIC							
Range (g)	±2	±5	±10	±25	±50	±100	
Sensitivity (mV/g)	1000	400	200	80	40	20	±10%
Frequency Response (Hz)	0-150	0-150	0-200	0-400	0-600	0-1000	±5% ¹
Frequency Response (Hz)	0-400	0-400	0-550	0-800	0-100	0-1400	±1dB
Natural Frequency (Hz)	700	800	1000	1500	4000	6000	
Non-Linearity (%FSO)	±0.5	±0.5	±0.5	±0.5	±0.5	±0.5	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1 Typical
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.7	
Shock Limit (g)	5000	5000	5000	5000	5000	5000	
Residual Noise (µV RMS)	500	500	450	550	450	450	Passband
Spectral Noise (µg/√Hz)	35	38	75	219	316	516	Passband


ELECTRICAL							
Zero Acceleration Output (mV)	±50						Differential
Excitation Voltage (Vdc)	7 to 30						
Excitation Current (mA)	<5						
Bias Voltage (Vdc)	2.5						
Output Resistance (Ω)	<100						
Insulation Resistance (MΩ)	>100						@100Vdc
Turn On Time (msec)	<100						
Ground Isolation	Isolated from Mounting Surface						

ENVIRONMENTAL							
Thermal Zero Shift (%FSO/°C)	±0.004						Typical
Thermal Sensitivity Shift (%/°C)	±0.010						Typical
Operating Temperature (°C)	-55 to 125						
Storage Temperature (°C)	-55 to 125						
Humidity	Epoxy Encapsulated, IP65						

PHYSICAL							
Case Material	Anodized Aluminum						
Cable	4x #26 AWG Conductors, PFA Insulated, Braided Shield, PFA Jacket						
Weight (grams)	14						
Mounting	2x #4 or M3 Screws						
Mounting Torque	6 lb-in (0.7 N-m)						

- Calibration supplied:** CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit¹
- Supplied accessories:** AC-A02944 2x #4-40 (3/4 length) Socket Head Cap Screw and Washer
- Optional accessories:** 121 3-Channel Precision Low Noise DC Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

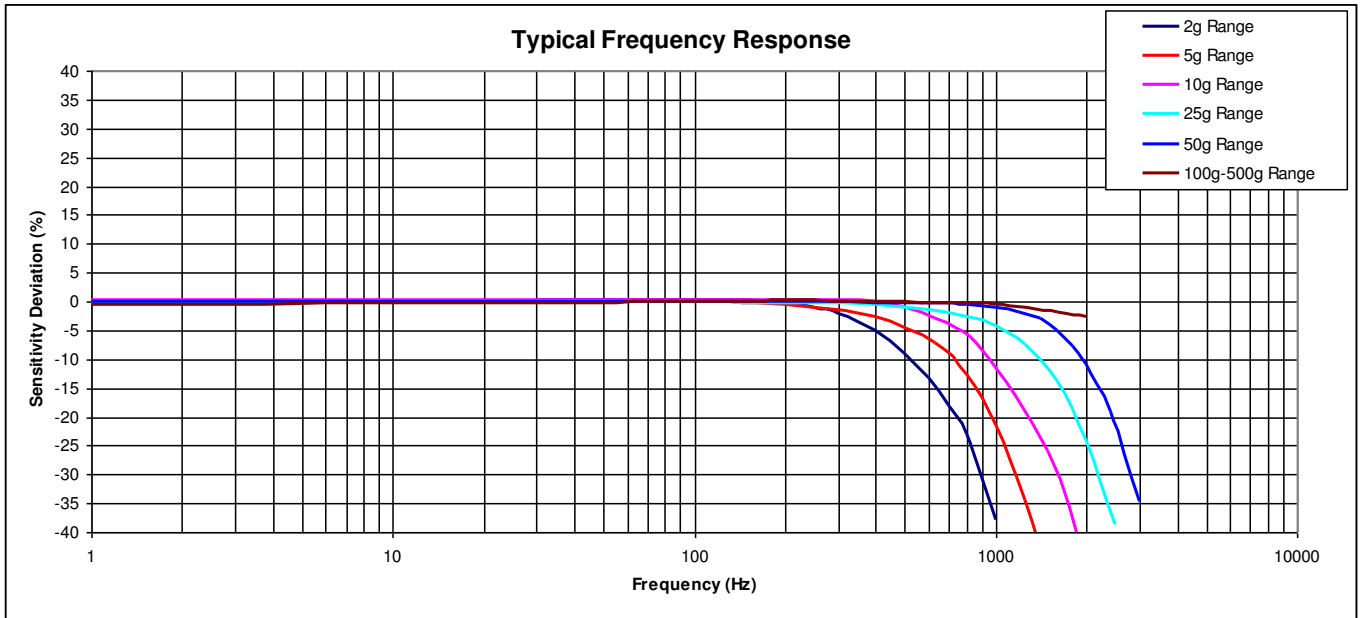

ORDERING INFORMATION

4623	GGG	ZZZ	C
Series Type			
Range			
002=2g			
005=5g			
010=10g			
025=25g			
050=50g			
100=100g			
Cable length			
060=60 inches			
120=120 inches			
180=180 inches			
240=240 inches			
300=300 inches			
360=360 inches			
480=480 inches			
600=600 inches			
197=197 inches, 5 meters			
394=394 inches, 10 meters			

Example; 4623-010-060-C
Model 4623, 10g range, 60inch cable length

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Phone: 800-522-6752
Email: customercare.hmpt@te.com

EUROPE

MEAS France SAS
a TE Connectivity Company
Phone: 800-440-5100
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Phone: 0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.