


DIMENSIONS

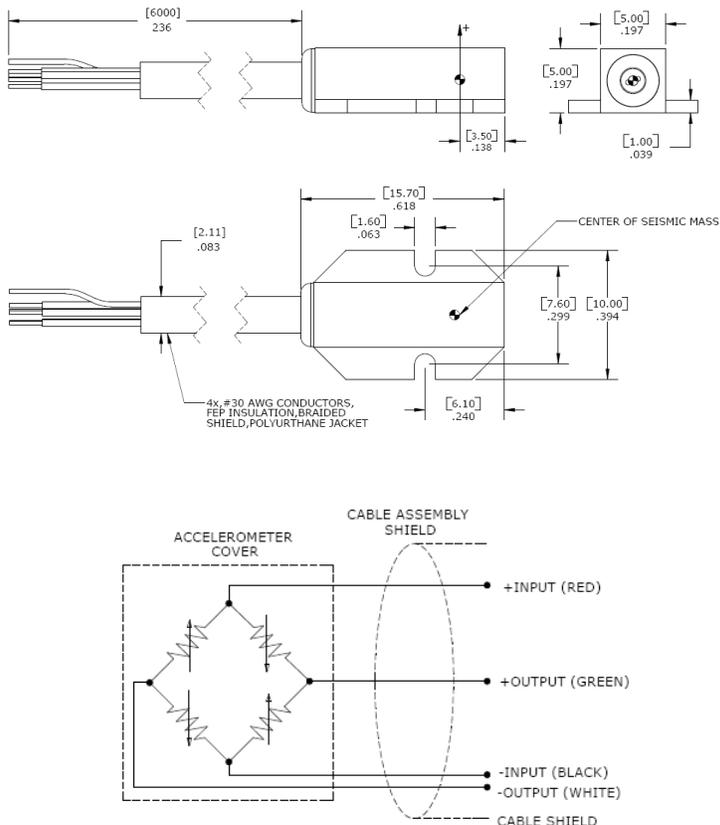

MODEL EGCS-S425 ACCELEROMETER

SPECIFICATIONS

- ◆ Range ± 50 to $\pm 2000g$
- ◆ Critically Damped
- ◆ Internally Compensated
- ◆ ISO 6487 Compliant

The Model EGCS-S425 is a small, ISO 6487 and SAE J211 compliant piezoresistive accelerometer. This unit features internal temperature compensation, anodized aluminum alloy housing and flexible cable output. This sensing element is damped with fluid to extend useful frequency range and reduce the effect of high frequencies.

FEATURES

- ◆ Fluid Damping
- ◆ Ranges from $\pm 50g$ to $\pm 2000g$
- ◆ Flexible Cable
- ◆ -20°C to $+80^{\circ}\text{C}$ Temperature Range
- ◆ Built-in mechanical stops
- ◆ Low zero offset $< \pm 10$ mV
- ◆ Internal Temperature Compensation
- ◆ 10Vdc Excitation with ± 150 mV Output

APPLICATIONS

- ◆ Auto Safety Testing
 - ◆ Crash
 - ◆ Sled
 - ◆ Dummy
- ◆ Pedestrian Impact
- ◆ Dummy Head Impact

PERFORMANCE SPECIFICATIONS

All values are typical at ±24°C, 100Hz and 10Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

RANGES AND OUTPUTS:

g range "FS"	g over- range limit	Attenuation Fh	Attenuation Fn	Attenuation 2Fh	Natural Frequency Minimum
±50	±5000	At 180 Hz ±0.5dB	At 300 Hz +0.5dB / -2dB	At 360 Hz +0.5dB / -4dB	Min. 1 kHz
±100	±5000	At 600 Hz ±0.5dB	At 1000 Hz +0.5dB / -2dB	At 1200 Hz +0.5dB / -4dB	1.5 kHz
±250	±10000	At 1000 Hz ±0.5dB	At 1650 Hz +0.5dB / -2dB	At 2000 Hz +0.5dB / -4dB	2.5 kHz
±500	±10000	At 1200 Hz ±0.2dB	At 2000 Hz +0.2dB / -1dB	At 4000 Hz <+0.35dB	4.5 kHz
±1000	±10000	±0.2dB	+0.2dB / -1dB	<+0.35dB	6 kHz
±2000	±10000	±0.2dB	+0.2dB / -1dB	<+0.35dB	10 kHz

□

DYNAMIC

	Value	Unit	Notes
Full Scale Output	±150	mV	Nominal (Min ±100, Max ±225)
Non-Linearity and Hysteresis	< ±1	%FSO	
Transverse Sensitivity	1	%	Nominal
Zero Acceleration Output	±10	mV	
Thermal Zero Shift (TZS)	±3	mV	
Thermal Sensitivity Shift (TSS)	< ±0.1	% / °C	
Damping Ratio	0.7		Nominal

ELECTRICAL

Voltage Excitation	10	Vdc	Alternate excitations available
Input Resistance	2000	Ω	Nominal
Output Resistance	1000	Ω	Nominal

PHYSICAL

Weight Without Cable	< 5	Grams	Standard cable length = 6 meters
Case Material			Anodized aluminum
Cable			4x #30 AWG, FEP Insulated, Braided Shield, TPU Jacket

ENVIRONMENTAL

Operating Temperature	-20 to +80	°C	
-----------------------	------------	----	--

