


Vibration Acceleration Sensor with Peak Output 4 – 20 mA

KSI84AP-...


Properties

- Suited for direct connection to standard control and measurement equipment, e.g. PLCs or panel meters
- Particularly suited for applications at higher frequencies, e.g. bearing or gearbox monitoring and for shock vibration
- Types with different measurement ranges
- Loop powered
- Ground insulated
- Compact and rugged design
- M12 socket for easy cable connection
- Protected against false polarization and overvoltage
- Double shielded case for best EMC properties
- High protection grade IP68
- With identical design also available as velocity and displacement sensor with RMS or peak output

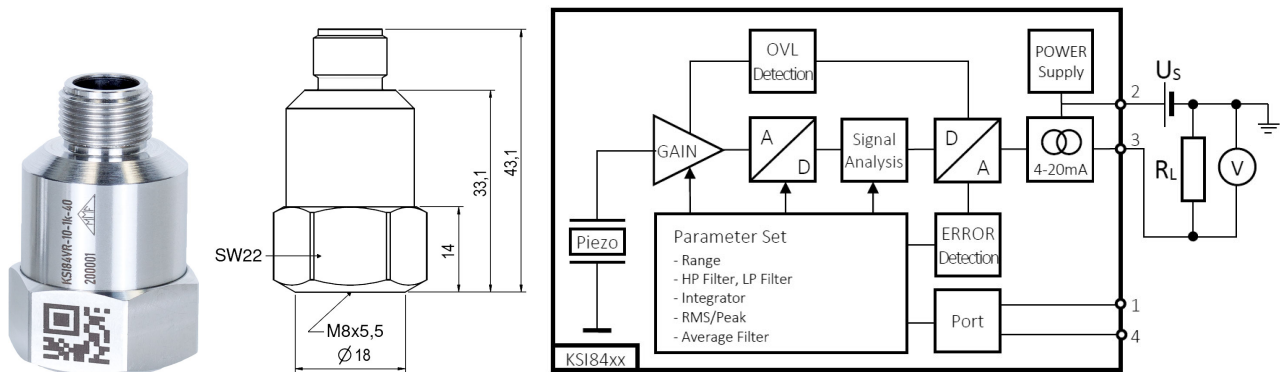


Piezo design	Shear design	
Output	4 .. 20 mA, peak of vibration acceleration	
Full scale value (cf. type list)	10 / 20 / 50 / 100 / 200 / 500	mm/s
Linear range for <2 % error, referred to full scale output	1 – 112,5	%
Full scale tolerance	2	%
Destruction limit	±5000	g
Transverse sensitivity	<5	%
Lower frequency limit (cf. type list)	1,5 / 3 / 10 / 30 / 100 / 1000	Hz
Upper frequency limit (cf. type list)	100 / 300 / 1000 / 5000 / 10000	Hz
Settling time	2 (HP ≥ 30 Hz); 4 (HP < 30 Hz)	s
Operating temperature range	-40 - 100	°C
Temperature coefficient of sensitivity	+0,015	%/K
4 mA offset drift over operating temperature range	±4	µA
4 mA offset drift over time	±1	µA
Weight without cable	60	g
Case material	Stainless steel	
Direction of connector	axial	
Connection	M12, 4 contacts, male. (Binder 713)	
Mounting	tapped hole M8 x 5,5	
Isolation at 250 VDC	>4	GΩ
Protection grade	IP68	
Piezo design	Shear design	


Typical Amplitude Response (example)

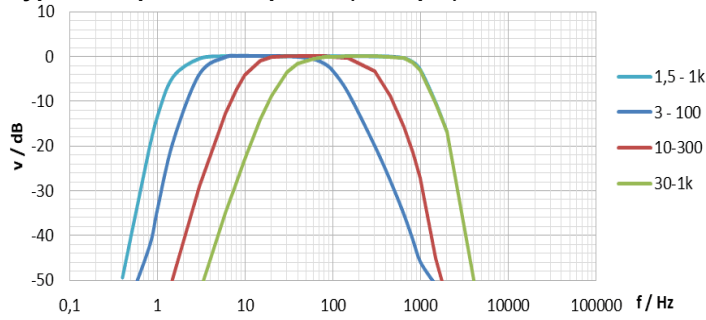

Linearity vs. Temperature and Vibration Amplitude

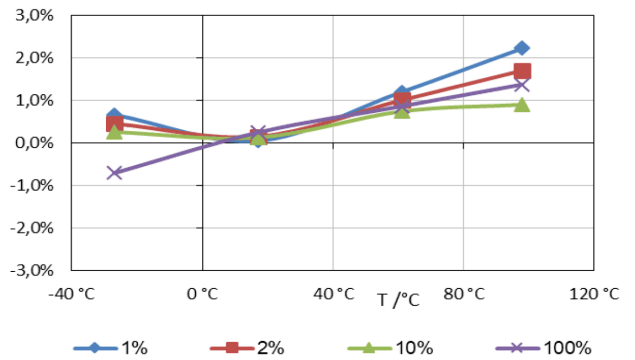

Contact Arrangement



Type List

High pass H [Hz]	Low pass L [Hz]	Range R [mm/s]	Type code KSI84AP-H-L-R	Noise [mm/s]
1,5	100/300/1k	10	KSI84AP-1-L-10	0,005
1,5	100/300/1k	20	KSI84AP-1-L-20	0,005
1,5	100/300/1k	50	KSI84AP-1-L-50	0,007
1,5	100/300/1k	100	KSI84AP-1-L-100	0,007
1,5	100/300/1k	200	KSI84AP-1-L-200	0,008
1,5	100/300/1k	500	KSI84AP-1-L-500	0,016
1,5	5k	10	KSI84AP-1-5k-10	0,02
1,5	5k	20	KSI84AP-1-5k-20	0,02
1,5	5k	50	KSI84AP-1-5k-50	0,03
1,5	5k	100	KSI84AP-1-5k-100	0,06
1,5	5k	200	KSI84AP-1-5k-200	0,08
1,5	5k	500	KSI84AP-1-5k-500	0,16
1,5	10k	50	KSI84AP-1-10k-50	0,09
1,5	10k	100	KSI84AP-1-10k-100	0,18
1,5	10k	200	KSI84AP-1-10k-200	0,2
1,5	10k	500	KSI84AP-1-10k-500	0,25
3/10/30/100	100/300/1k	10	KSI84AP-H-L-10	0,005
3/10/30/100	100/300/1k	20	KSI84AP-H-L-20	0,005
3/10/30/100	100/300/1k	50	KSI84AP-H-L-50	0,007
3/10/30/100	100/300/1k	100	KSI84AP-H-L-100	0,007
3/10/30/100	100/300/1k	200	KSI84AP-H-L-200	0,008
3/10/30/100	100/300/1k	500	KSI84AP-H-L-500	0,016
1k	10k	50	KSI84AP-1k-10k-50	0,09
1k	10k	100	KSI84AP-1k-10k-100	0,18
1k	10k	200	KSI84AP-1k-10k-200	0,2
1k	10k	500	KSI84AP-1k-10k-500	0,25

Mounting Accessories

- 043: Mounting stud; M8 x 10
- 229: Adhesive flange; conductive; M8; D25; >250 °C
- 208: Rare earth magnetic base; M8; D30; 120 °C
- 230: Triaxial mounting cube; M8; □34

Connection Accessories

- 080G: Plug Binder 713 (female) with screw terminals, IP67; straight
- 080W: Plug Binder 713 (female) with screw terminals, IP67; angled
- 082-B713G-PIG-5: Cable for KSI84xx; 5 m; Binder 713; straight; female to pig tail; 80 °C; D5
- 082-B713W-PIG-5: Cable for KSI84xx; 5 m; Binder 713; angled; female to pig tail; 80 °C; D5

